




DATA SHEET



LED BACK-LIT PANEL

60X60 PREMIUM 36W | WITH EU-PLUG AND NO PLUG



AVAILABLE MODELS WITH EU-PLUG

Color Temp	REF No
3000K	905938
4000K	905939
6000K	905940

AVAILABLE MODELS NO PLUG

Color Temp	REF No
3000K	905946
4000K	905947
6000K	905948

595x595

36W

110 lm/W


5 years

3000K, 4000K, 6000K

TÜV LED Driver

Flicker-free

CE

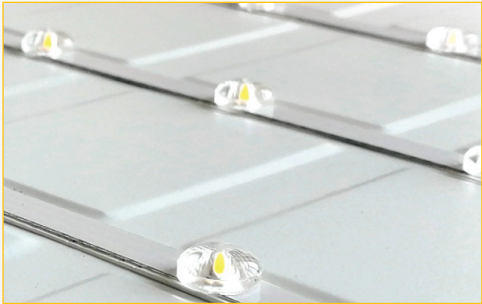

DATA SHEET



LED BACK-LIT PANEL

60X60 PREMIUM 36W | WITH EU-PLUG AND NO PLUG

ELECTRICAL DATA

Wattage (Consumption)	36W
Voltage	200-240V
Max. Current	0.3 A
Operating Voltage	DC36V
Constant Current	0.90 A
Power Factor	≥0,95

PHOTOMETRICAL DATA

Temperature (Kelvin)	3000K, 4000K or 6000K
Light color	Warm white, neutral white or cool white
Luminous efficiency	110 lm/W
Lumen	3960
Beam angle	120°
Color Rendering Index (CRI)	≥0,80
Operating Temperature	-20 °C to +50 °C
Storage Temperature	-30 °C to +60 °C
Working Humidity	10-80% RH
Humidity Storage	10-90% RH

CAPABILITIES

Housing material	Aluminium
Housing color	White
Flicker-free	Yes
Dimmable	Yes (with dimmable driver)

LIFESPAN & WARRANTY

Lifespan	50.000 hrs
Warranty	5 years

DIMENSIONS & PACKAGING

Product Dimensions	595x595x35 mm
Packing Dimensions	645x95x645 mm
Inner box	2 pieces
Outer box	8 pieces

ADDITIONAL INFORMATION

IP Rating	IP41
LED Chip type	SMD2835
Luminaires Class	Class III
Certificates	CE & ROHS

AVAILABLE MODELS WITH EU-PLUG

Color Temp	REF No
3000K	905938
4000K	905939
6000K	905940

AVAILABLE MODELS NO PLUG

Color Temp	REF No
3000K	905946
4000K	905947
6000K	905948

595x595	36W	110 lm/W	5 years
3000K, 4000K, 6000K	LED Driver		

